

DC AXIAL FAN


深圳垒石热管理技术股份有限公司
Stoneplus Thermal Management Technologies



92x92x25mm



DIMENSIONS DRAWING

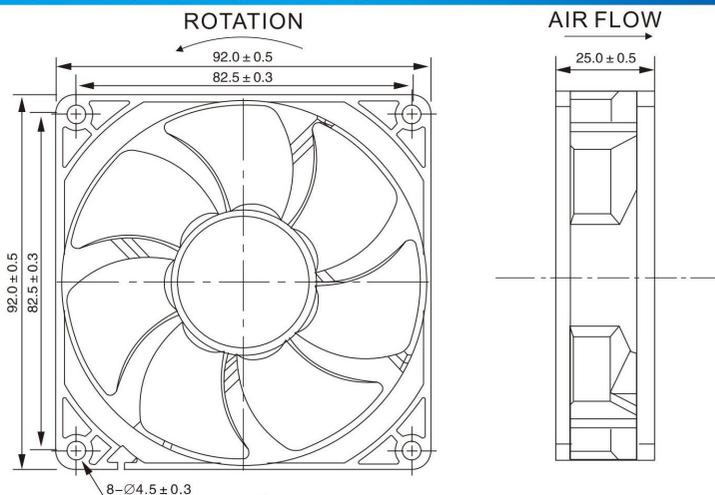


AVAILABLE FUNCTIONS

- 1. Moto protection
AS
- 2. Signal out put
FG **RD**
- 3. Speed control mode
PWM **VC**



P&Q CURVE(AT RATEDVOLTAGE)

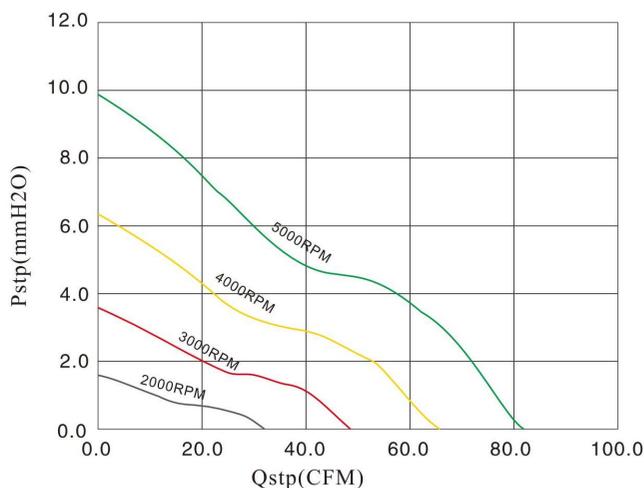

TECHNICAL PARAMETERS

Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH ₂ O	AMP	WATTS	dBA	g
SAA0925x12DA	Q or B	12	5000	81.74	9.89	0.59	7.08	49.3	92
SAA0925x12HA			4000	65.40	6.33	0.30	3.60	44.5	92
SAA0925x12MA			3000	49.05	3.56	0.19	2.28	38.0	92
SAA0925x12LA			2000	32.70	1.58	0.06	0.72	29.4	92
SAA0925x24DA	Q or B	24	5000	81.74	9.89	0.30	7.20	49.3	92
SAA0925x24HA			4000	65.40	6.33	0.15	3.60	44.5	92
SAA0925x24MA			3000	49.05	3.56	0.09	2.16	38.0	92
SAA0925x24LA			2000	32.70	1.58	0.04	0.96	29.4	92
SAA0925x48DA	Q or B	48	5000	81.74	9.89	0.15	7.20	49.3	92
SAA0925x48HA			4000	65.40	6.33	0.08	3.84	44.5	92
SAA0925x48MA			3000	49.05	3.56	0.06	2.88	38.0	92
SAA0925x48LA			2000	32.70	1.58	0.04	1.92	29.4	92


Notes1:The catalog have detail information in the front page for the functions.
2:If you want another rpm or voltage or functions which one in the list,please contact with our sales.

DC AXIAL FAN

92x92x32mm



DIMENSIONS DRAWING

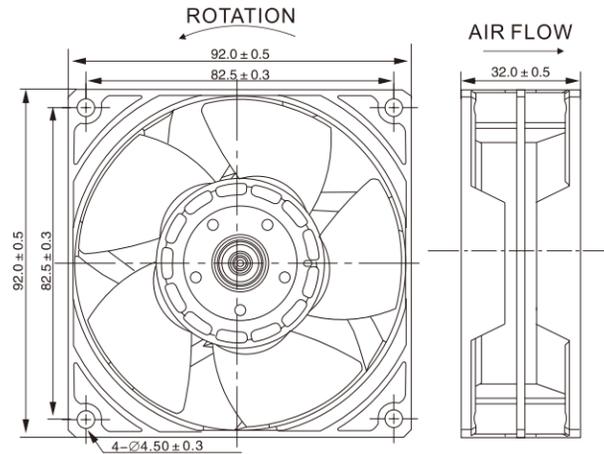


AVAILABLE FUNCTIONS

- 1. Moto protection
AS
- 2. Signal out put
FG **RD**
- 3. Speed control mode
PWM **VC**



P&Q CURVE(AT RATEDVOLTAGE)

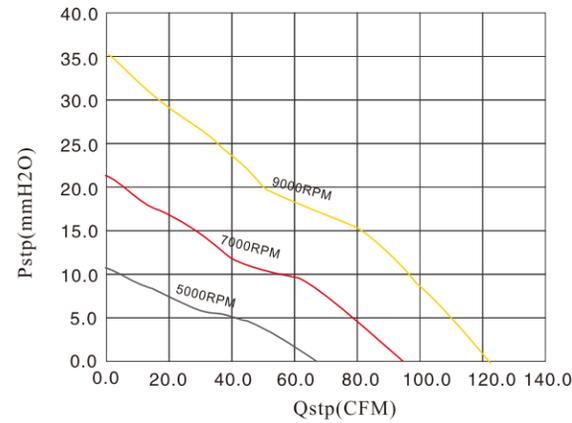

TECHNICAL PARAMETERS

Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH ₂ O	AMP	WATTS	dBA	g
SAA0932B12HA	B	12	9000	121.63	35.45	1.20	14.40	62.5	189
SAA0932B12MA			7000	94.60	21.45	0.87	10.44	56.6	189
SAA0932B12LA			5000	67.57	10.94	0.32	3.84	43.8	189
SAA0932B24HA	B	24	9000	121.63	35.45	0.93	22.32	62.5	189
SAA0932B24MA			7000	94.60	21.45	0.44	10.56	56.6	189
SAA0932B24LA			5000	67.57	10.94	0.16	3.84	43.8	189
SAA0932B48HA	B	48	9000	121.63	35.45	0.47	22.32	62.5	189
SAA0932B48MA			7000	94.60	21.45	0.22	10.56	56.6	189
SAA0932B48LA			5000	67.57	10.94	0.08	3.84	43.8	189


Notes1:The catalog have detail information in the front page for the functions.
2:If you want another rpm or voltage or functions which one in the list,please contact with our sales.

DC AXIAL FAN

92x92x38mm-1



DIMENSIONS DRAWING

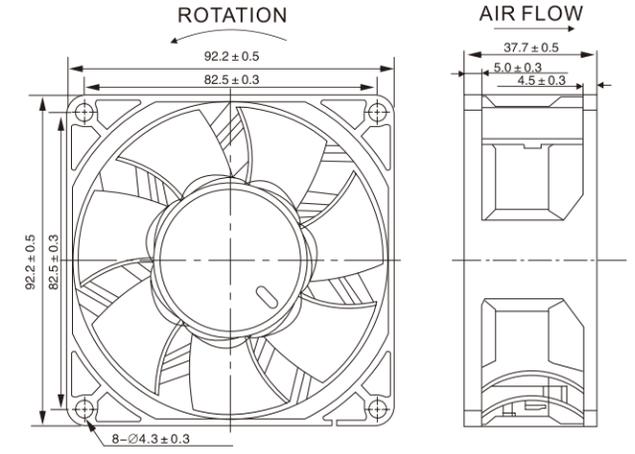


AVAILABLE FUNCTIONS

- 1. Moto protection
AS
- 2. Signal out put
FG **RD**
- 3. Speed control mode
PWM **VC**



P&Q CURVE(AT RATEDVOLTAGE)

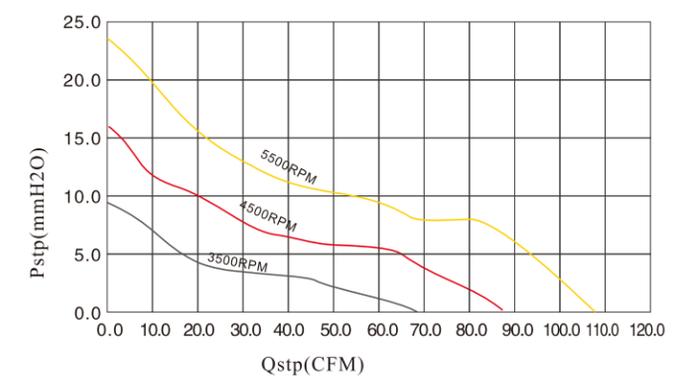

TECHNICAL PARAMETERS

Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH ₂ O	AMP	WATTS	dBA	g
SAA0938x12HA	S or B	12	5500	106.96	23.07	1.28	15.36	52.5	195
SAA0938x12MA			4500	87.51	15.44	0.71	8.52	48.5	195
SAA0938x12LA			3500	68.07	9.34	0.33	3.96	42.8	195
SAA0938x24HA	S or B	24	5500	106.96	23.07	0.64	15.36	52.5	195
SAA0938x24MA			4500	87.51	15.44	0.36	8.64	48.5	195
SAA0938x24LA			3500	68.07	9.34	0.17	4.08	42.8	195
SAA0938x48HA	S or B	48	5500	106.96	23.07	0.32	15.36	52.5	195
SAA0938x48MA			4500	87.51	15.44	0.18	8.64	48.5	195
SAA0938x48LA			3500	68.07	9.34	0.09	4.32	42.8	195

Notes1:The catalog have detail information in the front page for the functions.
2:If you want another rpm or voltage or functions which one in the list,please contact with our sales.