


## 75x75x30mm



### DIMENSIONS DRAWING

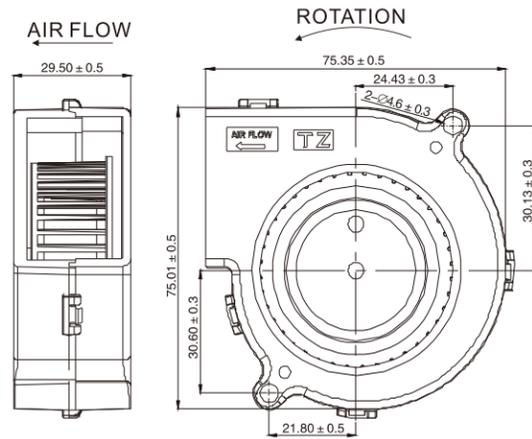


### AVAILABLE FUNCTIONS

- 1. Moto protection  
**AS**
- 2. Signal out put  
**FG RD**
- 3. Speed control mode  
**PWM VC**



### P&Q CURVE(AT RATED VOLTAGE)

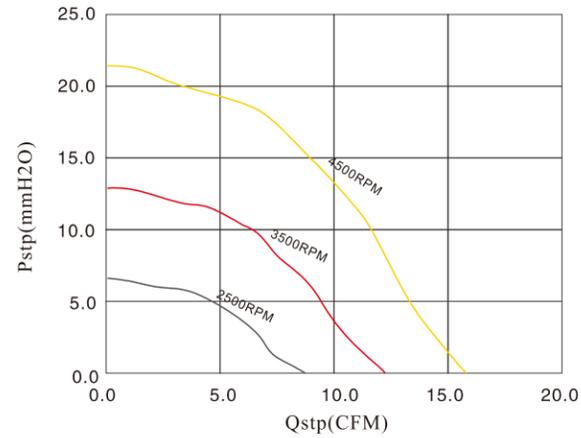

### TECHNICAL PARAMETERS


Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH <sub>2</sub> O	AMP	WATTS	dBA	g
SBA0C30x12HA	Q or B	12	4500	15.75	21.83	0.41	4.92	49.3	88
SBA0C30x12MA			3500	12.25	12.90	0.19	2.28	43.5	88
SBA0C30x12LA			2500	8.75	6.58	0.07	0.84	36.7	88
SBA0C30x24HA	Q or B	24	4500	15.75	21.88	0.21	5.04	49.3	88
SBA0C30x24MA			3500	12.25	12.90	0.10	2.40	43.5	88
SBA0C30x24LA			2500	8.75	6.58	0.04	0.96	36.7	88

Notes1: The catalog have detail information in the front page for the functions.  
2: If you want another rpm or voltage or functions which one in the list, please contact with our sales.

## 80x80x17mm



### DIMENSIONS DRAWING

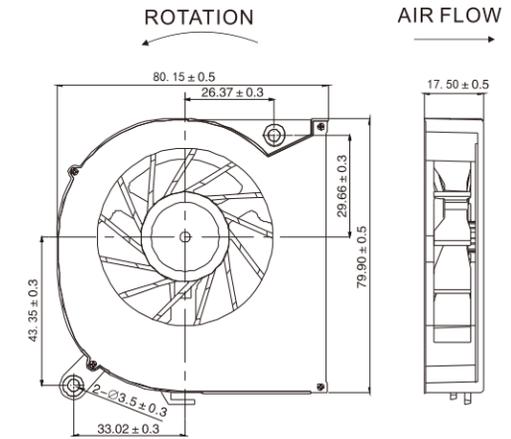


### AVAILABLE FUNCTIONS

- 1. Moto protection  
**AS**
- 2. Signal out put  
**FG RD**
- 3. Speed control mode  
**PWM VC**



### P&Q CURVE(AT RATED VOLTAGE)

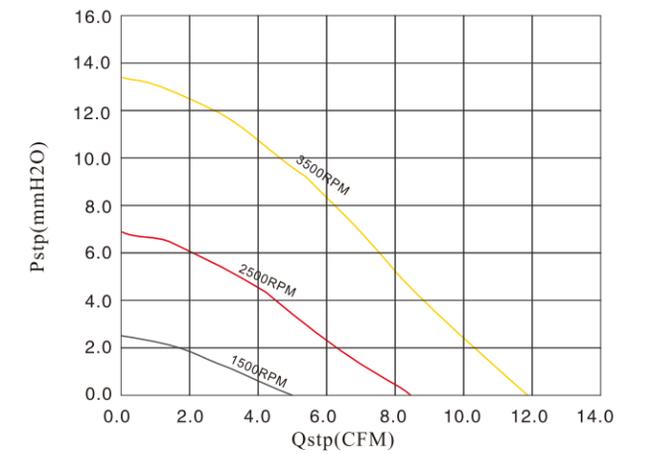

### TECHNICAL PARAMETERS


Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH <sub>2</sub> O	AMP	WATTS	dBA	g
SBA0817x12HA	Q or B	12	3500	11.82	13.48	0.30	3.60	38.9	55
SBA0817x12MA			2500	8.15	6.88	0.12	1.44	29.0	55
SBA0817x12LA			1500	5.07	2.48	0.06	0.72	18.0	55
SBA0817x24HA	Q or B	24	3500	11.82	13.48	0.15	1.80	38.9	55
SBA0817x24MA			2500	8.15	6.88	0.06	0.72	29.0	55
SBA0817x24LA			1500	5.07	2.48	0.05	0.60	18.0	55

Notes1: The catalog have detail information in the front page for the functions.  
2: If you want another rpm or voltage or functions which one in the list, please contact with our sales.

## 90x90x20mm



### DIMENSIONS DRAWING

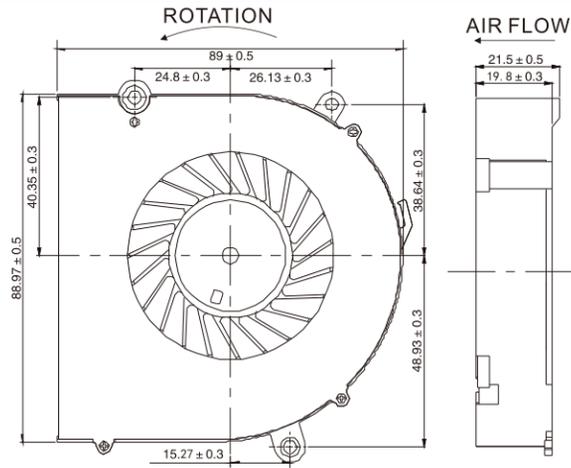


### AVAILABLE FUNCTIONS

- 1. Moto protection  
**AS**
- 2. Signal out put  
**FG** **RD**
- 3. Speed control mode  
**PWM** **VC**



### P&Q CURVE(AT RATEDVOLTAGE)

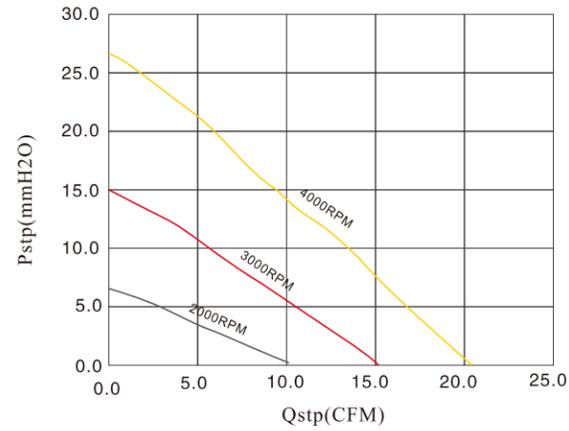

### TECHNICAL PARAMETERS


Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH <sub>2</sub> O	AMP	WATTS	dBA	g
SBA0920x12HA	Q or B	12	4000	20.41	26.61	0.46	5.52	43.5	77
SBA0920x12MA			3000	15.31	14.97	0.21	2.52	37.2	77
SBA0920x12LA			2000	10.20	6.65	0.10	1.20	28.4	77
SBA0920x24HA	Q or B	24	4000	20.41	26.61	0.23	5.52	43.5	77
SBA0920x24MA			3000	15.31	14.97	0.11	2.52	37.2	77
SBA0920x24LA			2000	10.20	6.65	0.05	1.20	28.4	77

Notes1:The catalog have detail information in the front page for the functions.  
2:If you want another rpm or voltage or functions which one in the list,please contact with our sales.

## 93x93x30mm



### DIMENSIONS DRAWING

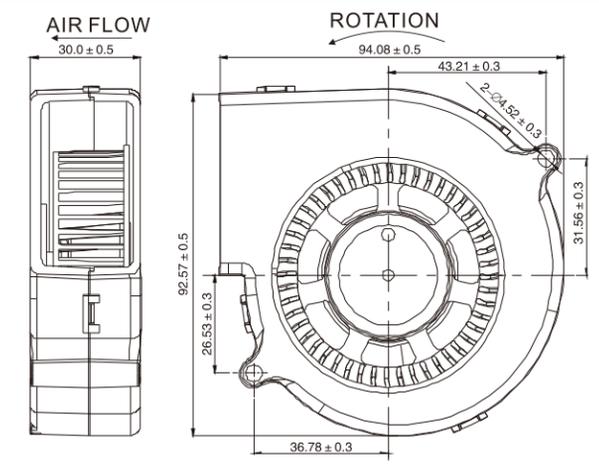


### AVAILABLE FUNCTIONS

- 1. Moto protection  
**AS**
- 2. Signal out put  
**FG** **RD**
- 3. Speed control mode  
**PWM** **VC**



### P&Q CURVE(AT RATEDVOLTAGE)

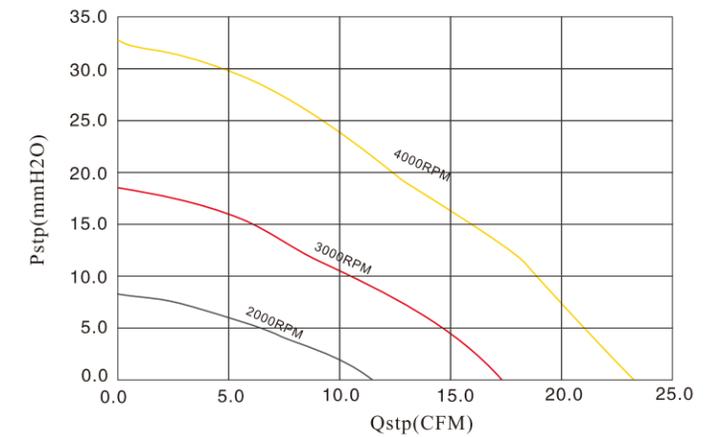

### TECHNICAL PARAMETERS


Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH <sub>2</sub> O	AMP	WATTS	dBA	g
SBA0D30x12HA	Q or B	12	4000	23.25	32.79	0.75	9.00	49.5	110
SBA0D30x12MA			3000	17.43	18.44	0.48	5.76	43.0	110
SBA0D30x12LA			2000	11.62	8.20	0.17	2.04	34.3	110
SBA0D30x24HA	Q or B	24	4000	23.25	32.79	0.38	9.00	49.5	110
SBA0D30x24MA			3000	17.43	18.44	0.24	5.76	43.0	110
SBA0D30x24LA			2000	11.62	8.20	0.09	2.16	34.3	110

Notes1:The catalog have detail information in the front page for the functions.  
2:If you want another rpm or voltage or functions which one in the list,please contact with our sales.

## 97x97x33mm



### DIMENSIONS DRAWING

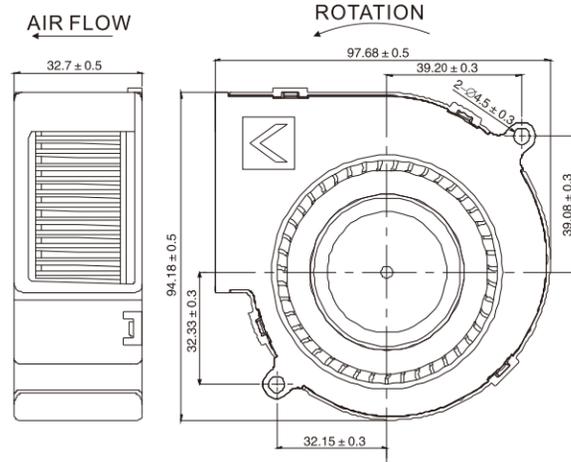


### AVAILABLE FUNCTIONS

- 1. Moto protection  
**AS**
- 2. Signal out put  
**FG RD**
- 3. Speed control mode  
**PWM VC**



### P&Q CURVE(AT RATED VOLTAGE)

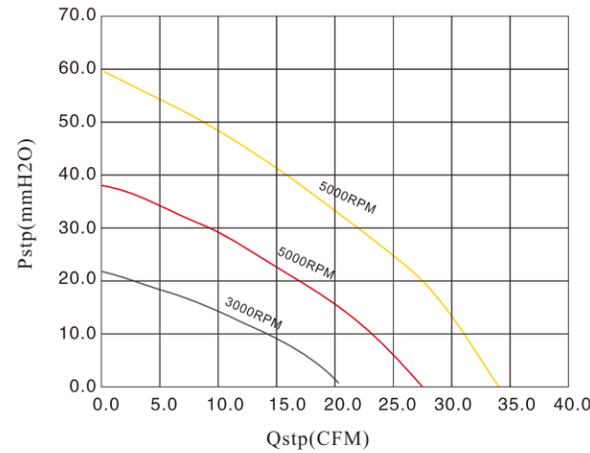

### TECHNICAL PARAMETERS


Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH <sub>2</sub> O	AMP	WATTS	dBA	g
SBA0E33B12HA	B	12	5000	34.04	59.15	1.34	16.08	61.8	175
SBA0E33B12MA			4000	27.28	37.86	0.69	8.28	57.0	175
SBA0E33B12LA			3000	20.43	21.29	0.29	3.48	50.7	175
SBA0E33B24HA	B	24	5000	34.04	59.15	0.77	18.48	61.8	175
SBA0E33B24MA			4000	27.28	37.86	0.40	9.60	57.0	175
SBA0E33B24LA			3000	20.43	21.29	0.17	4.08	50.7	175

Notes1: The catalog have detail information in the front page for the functions.  
2: If you want another rpm or voltage or functions which one in the list, please contact with our sales.

## ∅100x25.4mm



### DIMENSIONS DRAWING

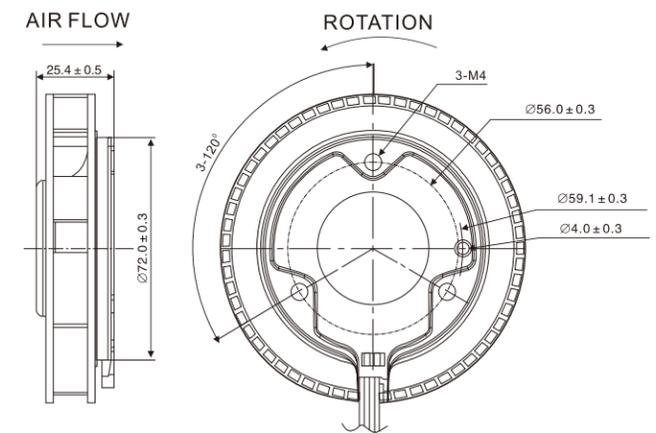


### AVAILABLE FUNCTIONS

- 1. Moto protection  
**AS**
- 2. Signal out put  
**FG RD**
- 3. Speed control mode  
**PWM VC**



### P&Q CURVE(AT RATED VOLTAGE)

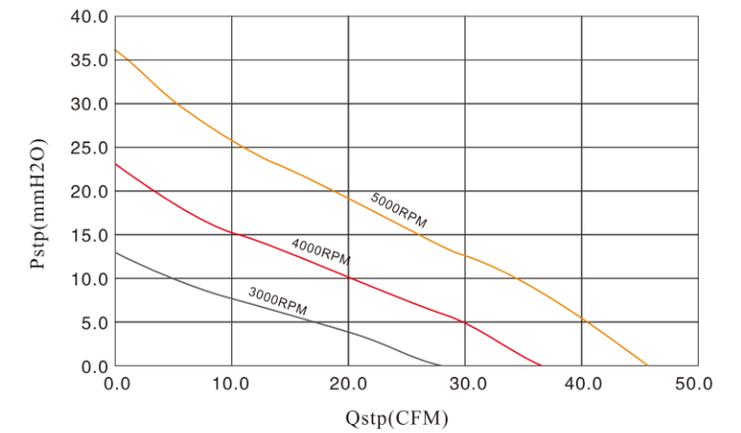

### TECHNICAL PARAMETERS


Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH <sub>2</sub> O	AMP	WATTS	dBA	g
SBA1025B12HA	B	12	5000	45.64	36.18	0.90	10.80	54.2	123
SBA1025B12MA			4000	36.51	23.16	0.52	6.24	49.5	123
SBA1025B12LA			3000	27.38	13.02	0.29	3.48	43.0	123
SBA1025B24HA	B	24	5000	45.64	36.18	0.47	11.28	54.2	123
SBA1025B24MA			4000	36.51	23.16	0.26	6.24	49.5	123
SBA1025B24LA			3000	27.38	13.02	0.15	3.60	43.0	123
SBA1025B48HA	B	48	5000	45.64	36.18	0.26	12.48	54.2	123
SBA1025B48MA			4000	36.51	23.16	0.13	6.24	49.5	123
SBA1025B48LA			3000	27.38	13.02	0.08	3.84	43.0	123

Notes1: The catalog have detail information in the front page for the functions.  
2: If you want another rpm or voltage or functions which one in the list, please contact with our sales.

## 120x120x32mm



### DIMENSIONS DRAWING

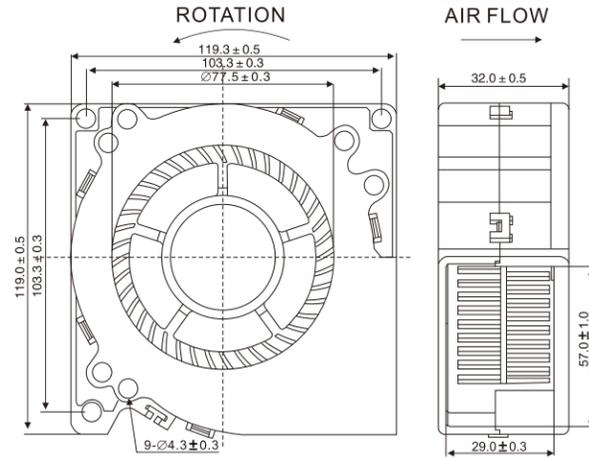


### AVAILABLE FUNCTIONS

- 1. Moto protection  
**AS**
- 2. Signal out put  
**FG RD**
- 3. Speed control mode  
**PWM VC**




### P&Q CURVE(AT RATED VOLTAGE)

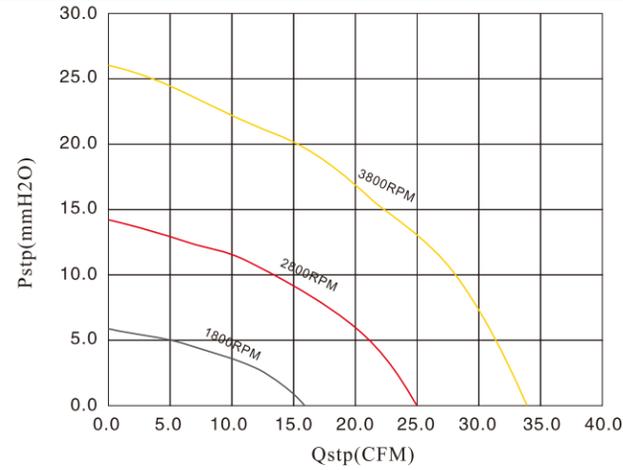

### TECHNICAL PARAMETERS

Model	Bearing	Rated Voltage	Speed	Air Flow	Static Pressure	Power Current	Power Consumption	Noise	Weight
Part NO.	Type	VDC	RPM	CFM	mmH <sub>2</sub> O	AMP	WATTS	dBA	g
SBA1232B12HA	B	12	3800	33.38	26.14	1.20	14.40	56.2	230
SBA1232B12MA			2800	24.93	14.19	0.80	9.60	49.5	230
SBA1232B12LA			1800	16.02	5.87	0.38	4.56	39.9	230
SBA1232B24HA	B	24	3800	33.38	26.14	0.60	14.40	56.2	230
SBA1232B24MA			2800	24.93	14.19	0.40	9.60	49.5	230
SBA1232B24LA			1800	16.02	5.87	0.19	4.56	39.9	230
SBA1232B48HA	B	48	3800	33.38	26.14	0.31	14.88	56.2	230
SBA1232B48MA			2800	24.93	14.19	0.21	10.08	49.5	230
SBA1232B48LA			1800	16.02	5.87	0.11	5.28	39.9	230

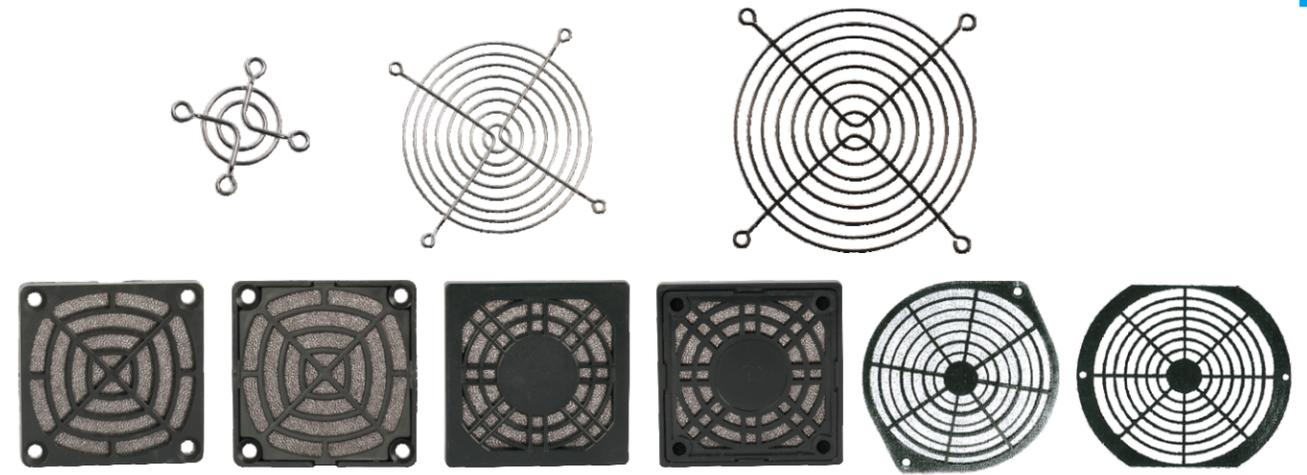

Size:40x40mm	Size:50x50mm	Size:60x60mm	Size:70x70mm	Size:80x80mm
Size:92x92mm	Size:110x110mm	Size:120x120mm	Size:135x135mm	
Size:150x150mm	Size:160x160mm	Size:170x170mm	Size:180x180mm	
Size:200x200mm	Size:220x220mm	Size:250x250mm	Size:300x300mm	